
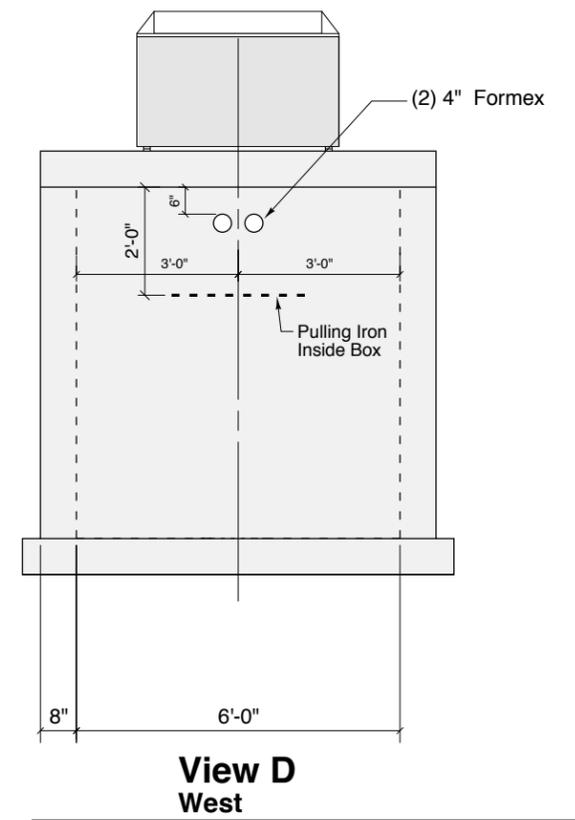
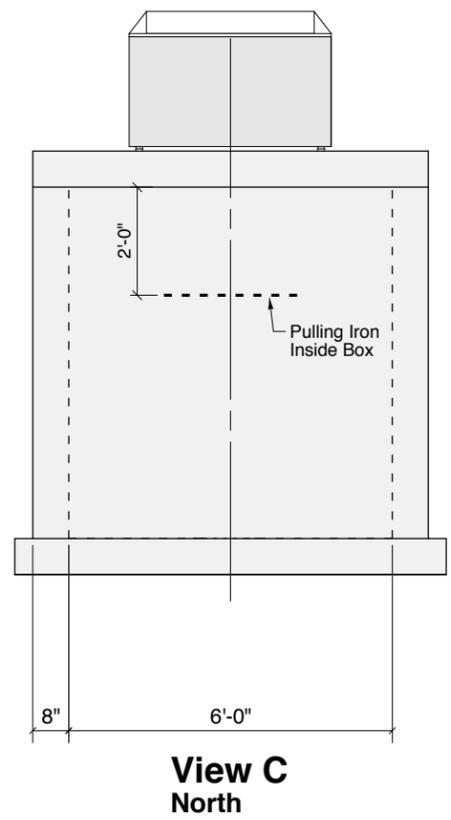
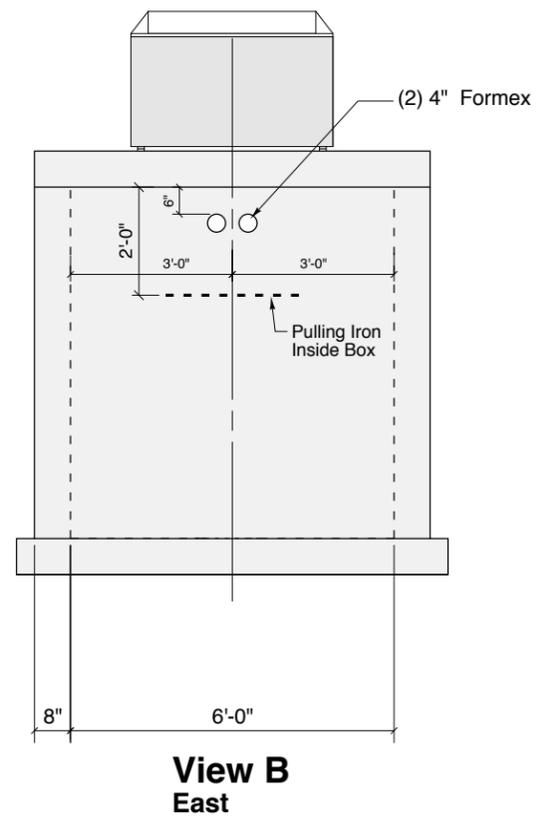


- General Notes:**
- Concrete - 5,000 PSI
 - HS20-44 & ACI318-99 Wheel Load Design
 - Pulling irons by Penn Insert
 - Joint Sealer - EZ-Stick (1" Dia.)
 - Covers to be marked - "ELECTRIC"
 - Optional Tremproof 60 Exterior Coating
- Weights**
- Base & Walls - 24,600 Lbs.
 - Cover - 5,500 Lbs.
- Reinforcement - Grade 60 Rebar #5 Bars @ 8" O.C.E.W. Or WWF Equiv. No Welding Allowed
 - Verify Formex Gang Bells Or Bowco Terminators Are Acceptable For Duct Entry's

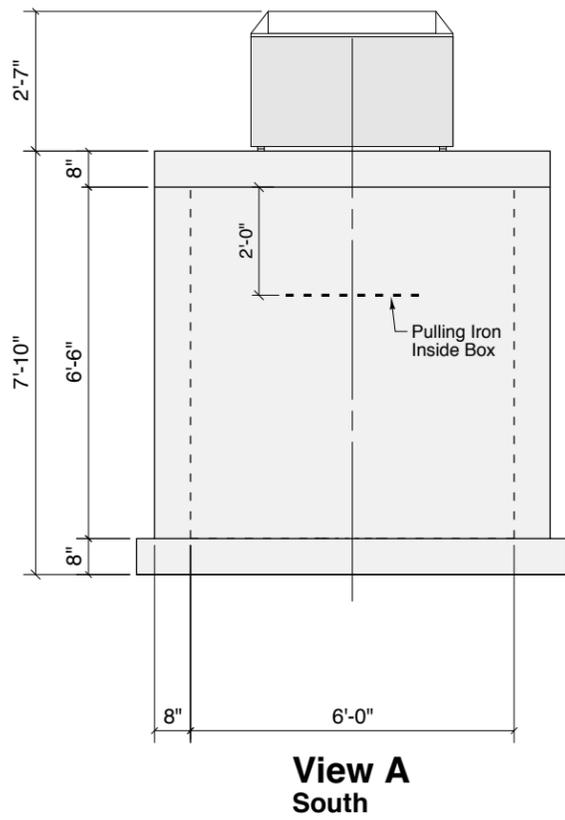

Typ. Electric Vault
(6'-0" Wide x 6'-0" Long x 6'-6" Deep)

Crest Precast, Inc.		Drawn By: KGT	
La Crescent, MN & Barneveld, WI		Revision	
800-658-9045		Project: 6'-0" x 6'-0" x 6'-6" Electric Vault	
Contractor:		Drawing Number 1	